

- Work area to be clear prior to installation (width of door and 4 meters back)
- No other persons in the work area during installation
- Inside face on sides and above door to be flush
- Wall and ceiling to be lined prior to installation and all paint/plaster to be completely dry
- All ceiling fixing must not be obstructed or interlocked with ceiling battens/Rondo.

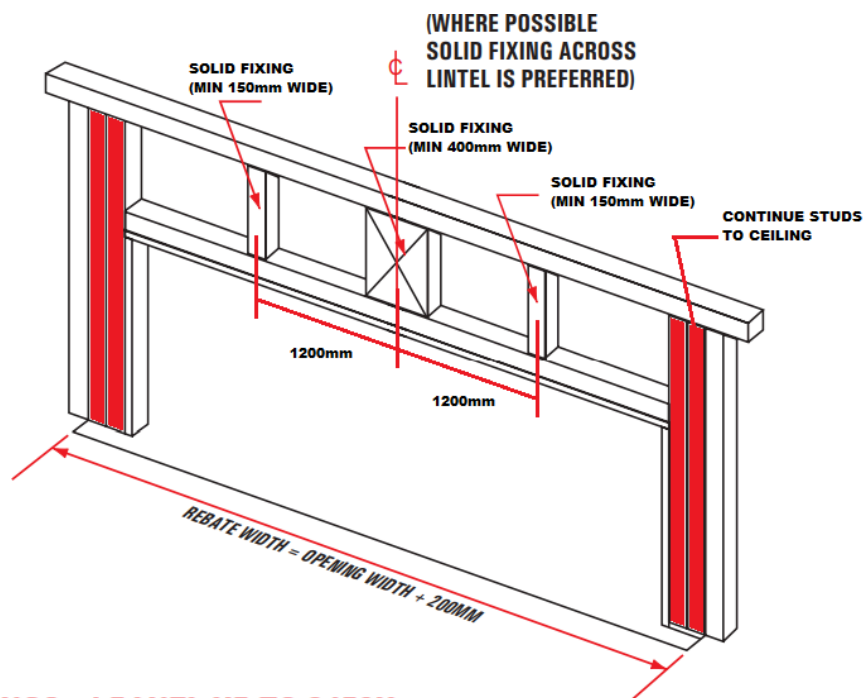
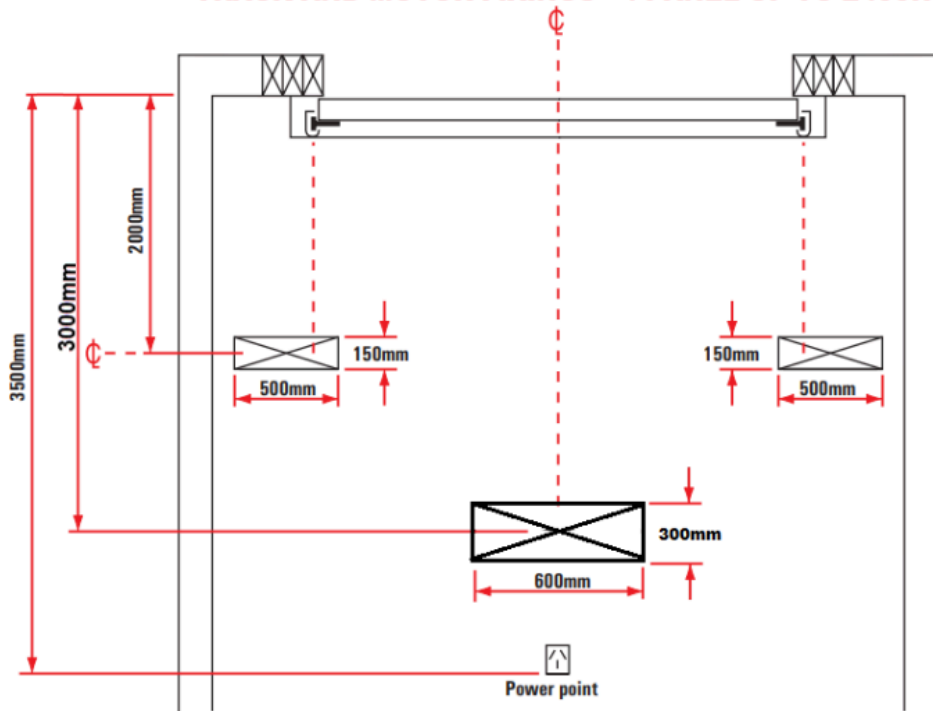
Warning: Delays or non installation due failure to adhere to these instructions may incur additional charges.

Minimum Clearances:

Std Headroom	300mm
Low Headroom	200mm
Sideroom	120mm
Side fixing	90mm
Backspace	Door height + 1m

Rebate 75mm past opening
75mm back from architrave
25mm deep

Note: Headroom is measured from the underside of the trim to the lowest point. This includes any GIB cove or beams that are lower than the ceiling.

**TRACK AND MOTOR FIXINGS - 4 PANEL UP TO 2450H****Site Specific:**

Lintel:

Side fixing:

Ceiling:

Gib Cove:

Architraves:

Trim:

Rebate: